

JOSEPH GILES



A Guide to Cremone Bolts

THE ENGLISH TAPWARE COMPANY

170 QUEEN ST, WOOLLAHRA, SYDNEY 2025 • 751 HIGH ST, ARMADALE, MELBOURNE 3143 • www.englishtapware.com.au


JOSEPH GILES

Right: Bespoke cremone bolt and handle photographed in DBZW dark bronze waxed finish

Below: Skeleton bolt and handle photographed in MABW mid antique waxed finish



Joseph Giles Hardware for French Doors

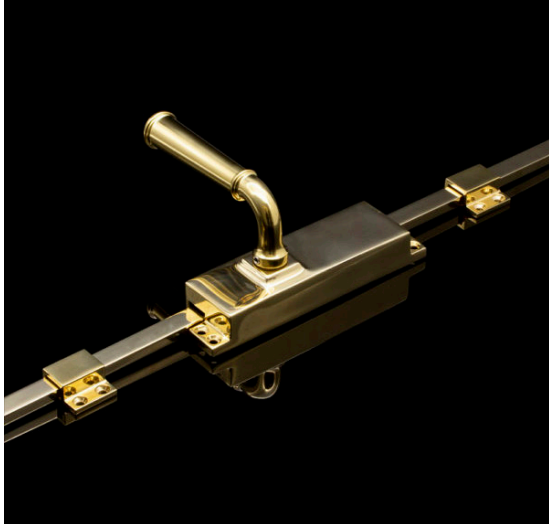

**WN1035: SOLID BRASS TRADITIONAL
SURFACE MOUNTED CREMONE BOLT**


Cremone bolts are designed to suit French doors and windows with narrow stiles. This product is compatible with a range of lever handles from our collection, please contact a member of our team to discuss your requirements.



**BL1009: SOLID BRASS SURFACE
SKELETON BOLTS**

This solid brass surface skeleton bolt is usually fitted vertically onto the face of a door or window. It secures the passive (slave) leaf of a double door set to enable the main leaf to latch or lock into the slave leaf. Often used in conjunction with cremone bolts that have been fitted on to the main leaf. The bolt is thrown and retracted by operating the knob. We usually recommend that two bolts are fitted per leaf, one at the top of the door and one at the bottom.

These bolts are also supplied with a receiver plate and countersunk and raised slotted screws with dimensions of 3.5x16mm and 4x25mm.


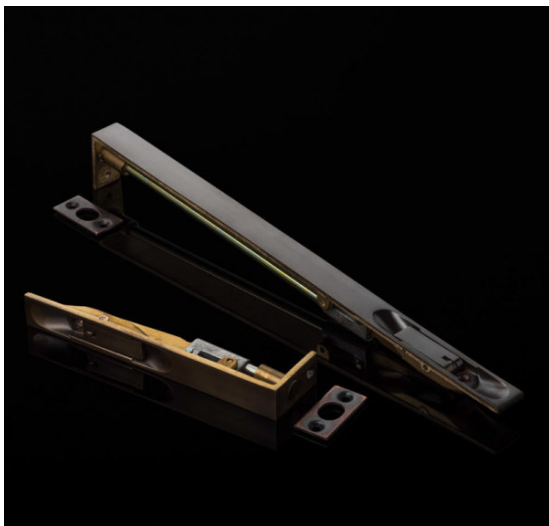


**BL1001: SOLID BRASS LEVER ACTION RECESSED
BOLT WITH RECEIVER PLATE**


This 19mm lever action flush bolt is designed to be recessed vertically into the end or face of a door and is usually used to secure the passive (slave) leaf of a double door set; enabling the main leaf to latch or lock into the slave leaf. The bolt is thrown and retracted by operating the small lever.

We recommend that two bolts are fitted per leaf, one at the top of the door and one at the bottom. A 'receiver plate' is supplied with each bolt, which can be used for a bolt being fitted to the top of a door.


Reference Guide to Door Elements

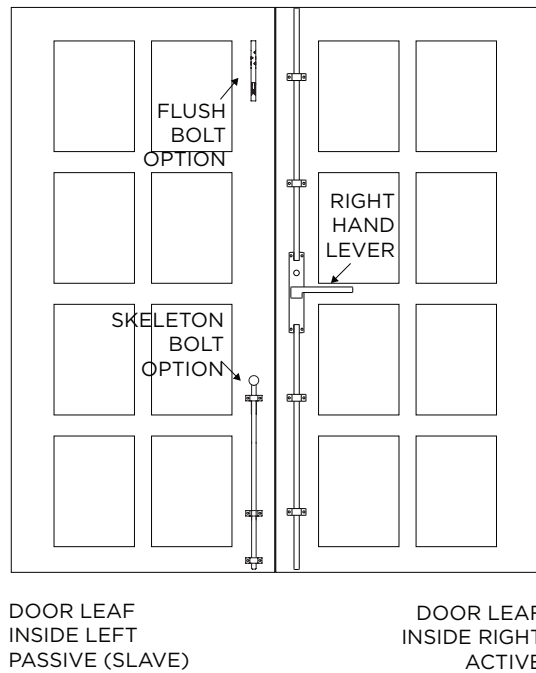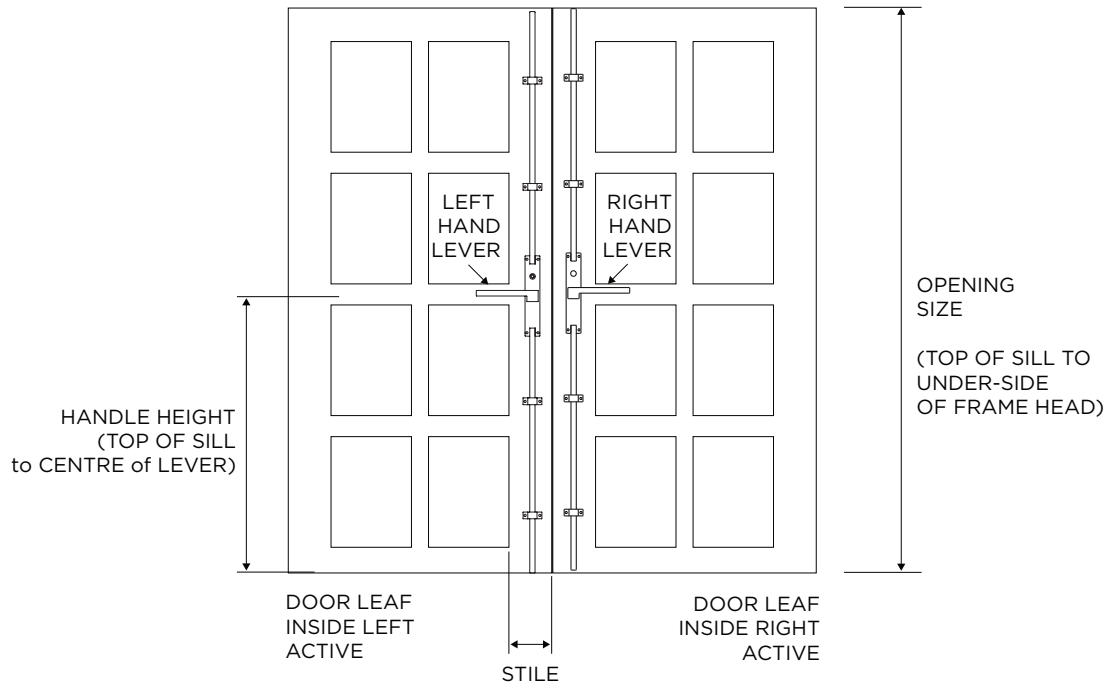

Inward vs Outward Opening Doors

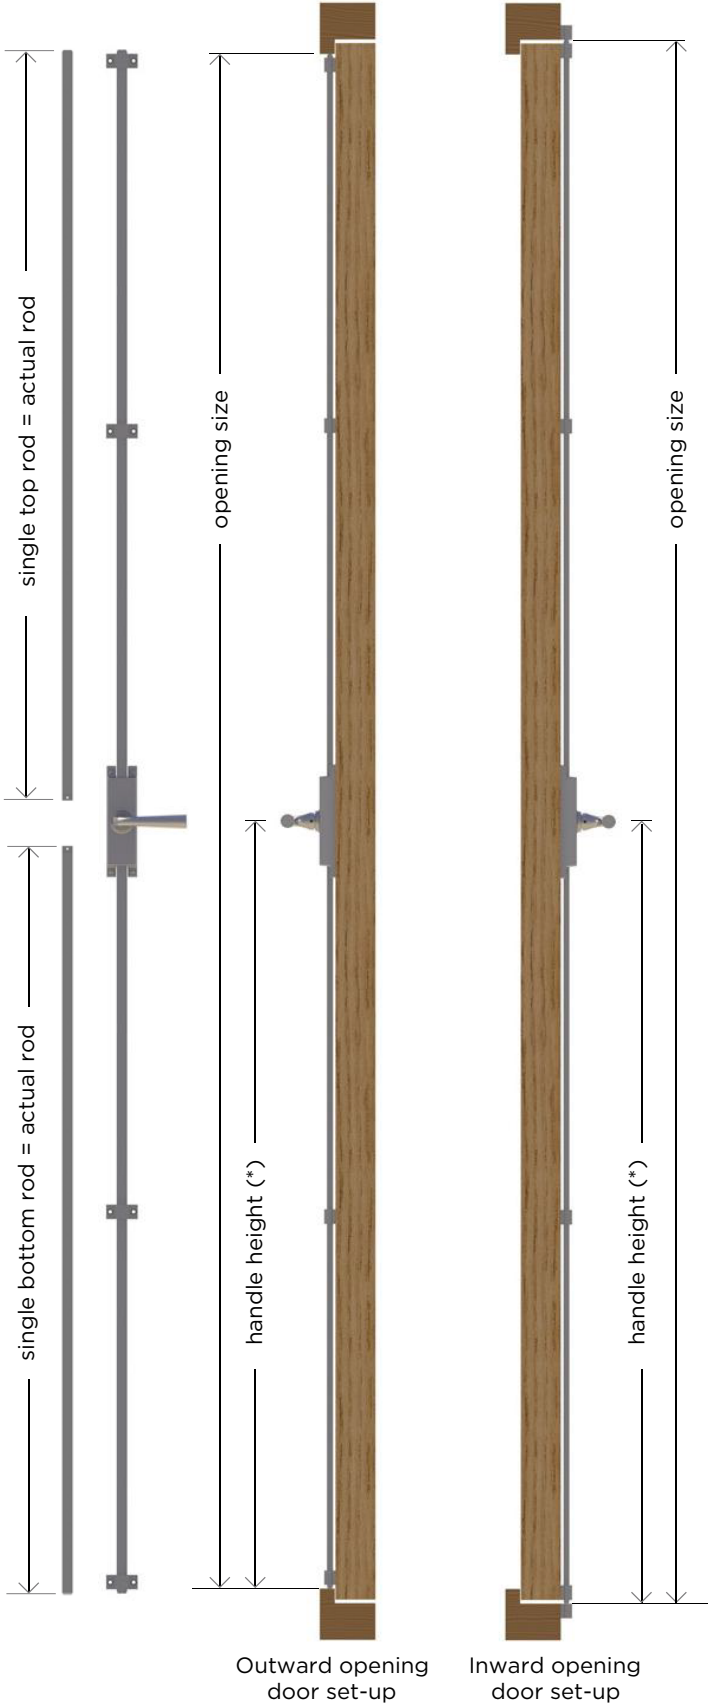


Double Doors - Inside Left active, Inside Right active - Lever

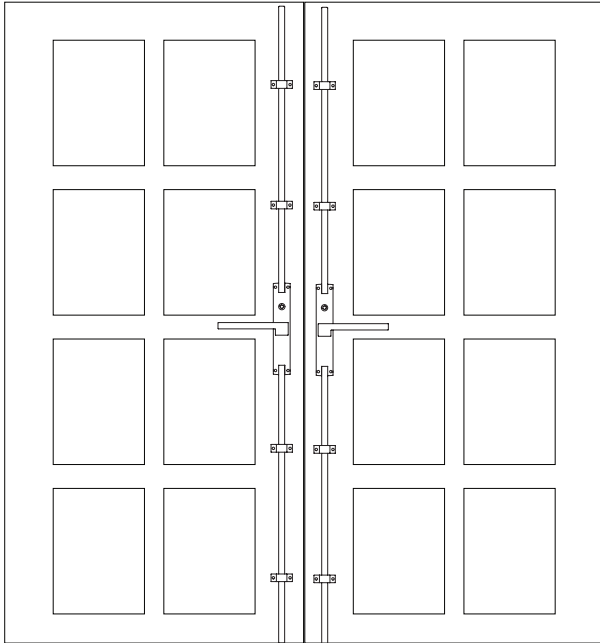

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

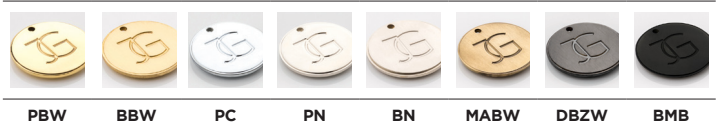


OPENING SIZE: _____ MM


HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

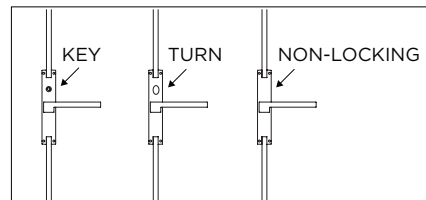

ROD TYPE: (please circle)



Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the lever and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR LEVERS

Joseph Giles Cremone Bolts are available with a full selection of operating levers.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).

CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.


The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

LEVER TYPE: SPECIFY JOSEPH GILES LEVER CODE


LV _____

IS LEVER HANDLE REQUIRED FOR OUTSIDE OF DOOR YES / NO, IF YES PLEASE CIRCLE

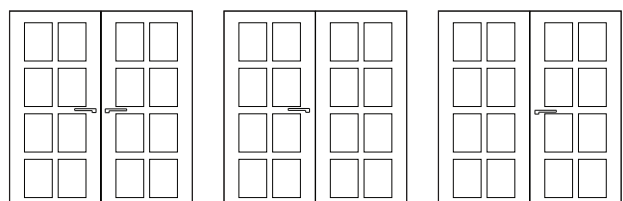

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left active, Inside Right active - Knob

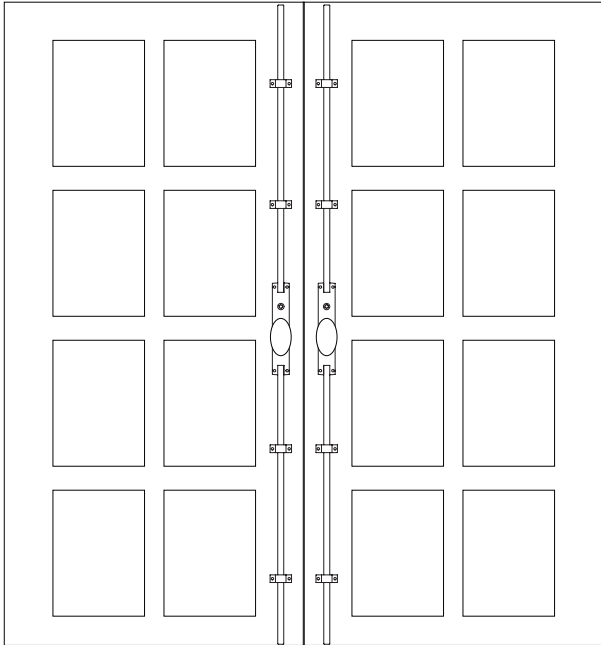

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)




OPENING SIZE: _____ MM


HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

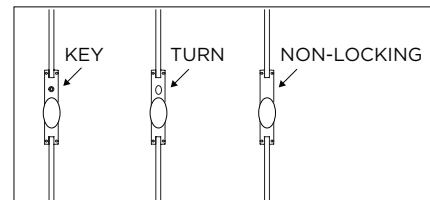

ROD TYPE: (please circle)



Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the knob and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR KNOBS

Joseph Giles Cremone Bolts are available with a full selection of operating door knobs.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).

CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.


The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

LEVER TYPE: SPECIFY JOSEPH GILES KNOB CODE


DK _____

IS DOOR KNOB REQUIRED FOR OUTSIDE OF DOOR
YES / NO, IF YES PLEASE CIRCLE

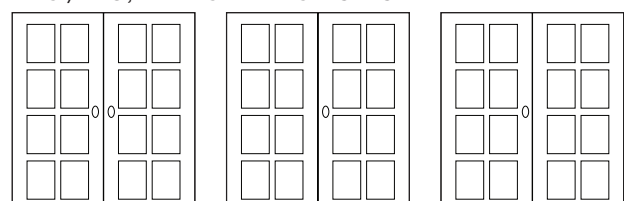

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left active, Inside Right Passive - Lever

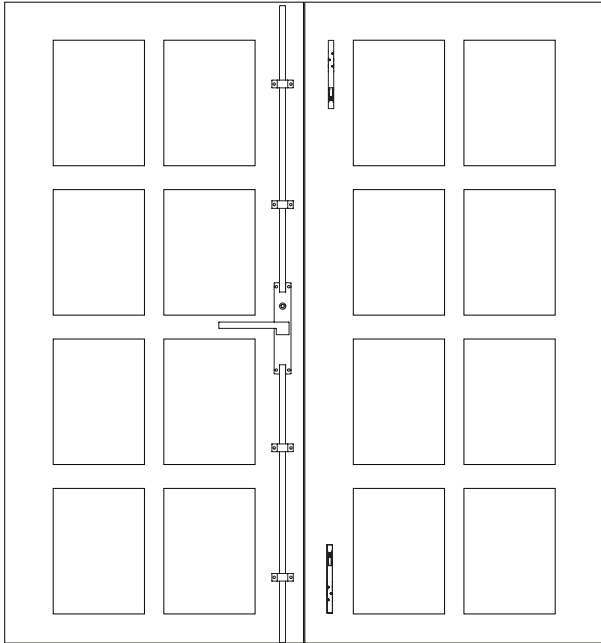

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

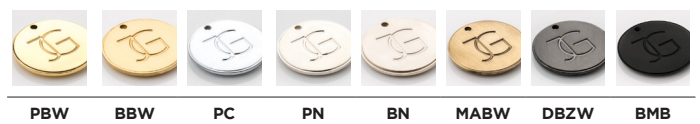


OPENING SIZE: _____ MM

HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

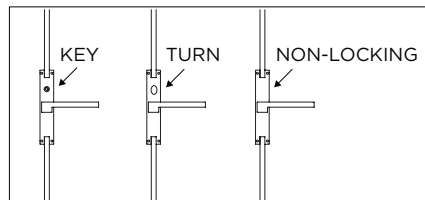

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the lever and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR LEVERS

Joseph Giles Cremone Bolts are available with a full selection of operating levers.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).


CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.

The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

ROD TYPE:
(please circle)




FLUSH BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm	<input type="checkbox"/>	<input type="checkbox"/>
203mm	<input type="checkbox"/>	<input type="checkbox"/>
305mm	<input type="checkbox"/>	<input type="checkbox"/>
457mm	<input type="checkbox"/>	<input type="checkbox"/>
609mm	<input type="checkbox"/>	<input type="checkbox"/>
762mm	<input type="checkbox"/>	<input type="checkbox"/>
914mm	<input type="checkbox"/>	<input type="checkbox"/>

LEVER TYPE: SPECIFY JOSEPH GILES LEVER CODE


LV _____

IS LEVER HANDLE REQUIRED FOR OUTSIDE OF DOOR YES / NO, IF YES PLEASE CIRCLE

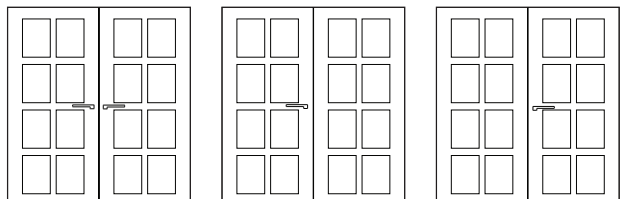

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left active, Inside Right Passive - Knob

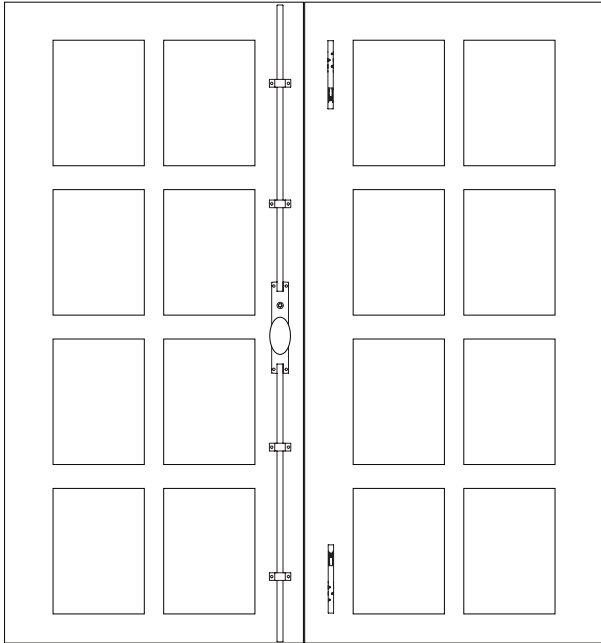

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

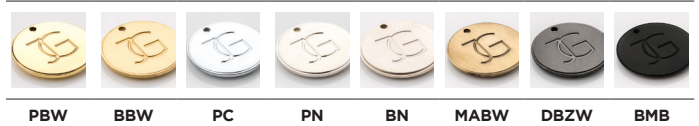


OPENING SIZE: _____ MM

HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

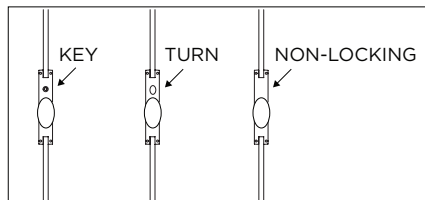

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the knob and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR KNOBS

Joseph Giles Cremone Bolts are available with a full selection of operating door knobs.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).


CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.

The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

ROD TYPE:
(please circle)




FLUSH BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm		
203mm		
305mm		
457mm		
609mm		
762mm		
914mm		

LEVER TYPE: SPECIFY JOSEPH GILES KNOB CODE


DK _____

IS DOOR KNOB REQUIRED FOR OUTSIDE OF DOOR
YES / NO, IF YES PLEASE CIRCLE

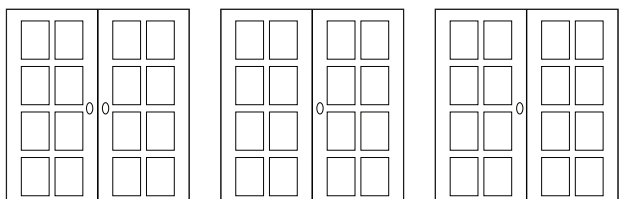

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left passive, Inside Right active - Lever

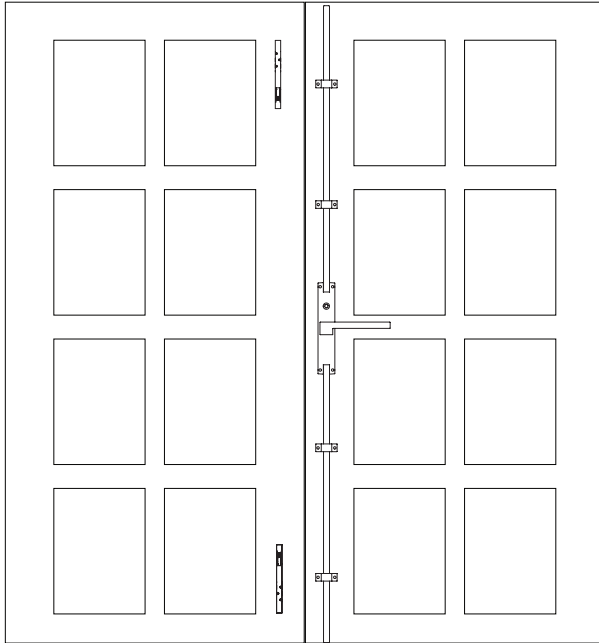

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

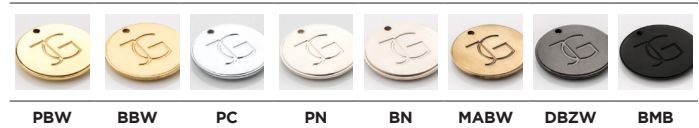


OPENING SIZE: _____ MM

HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

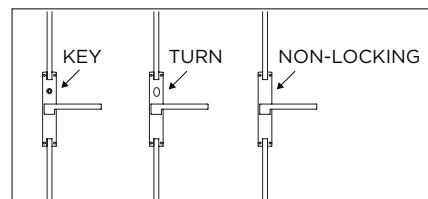

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the lever and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR LEVERS

Joseph Giles Cremone Bolts are available with a full selection of operating levers.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).


CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.

The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

ROD TYPE:
(please circle)




FLUSH BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm		
203mm		
305mm		
457mm		
609mm		
762mm		
914mm		

LEVER TYPE: SPECIFY JOSEPH GILES LEVER CODE


LV _____

IS LEVER HANDLE REQUIRED FOR OUTSIDE OF DOOR YES / NO, IF YES PLEASE CIRCLE

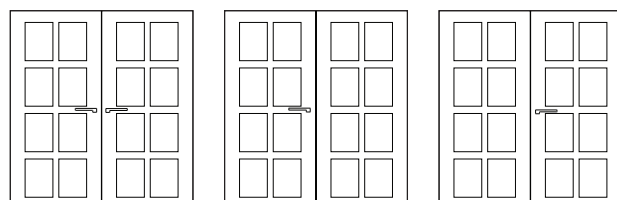

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left passive, Inside Right active - Knob

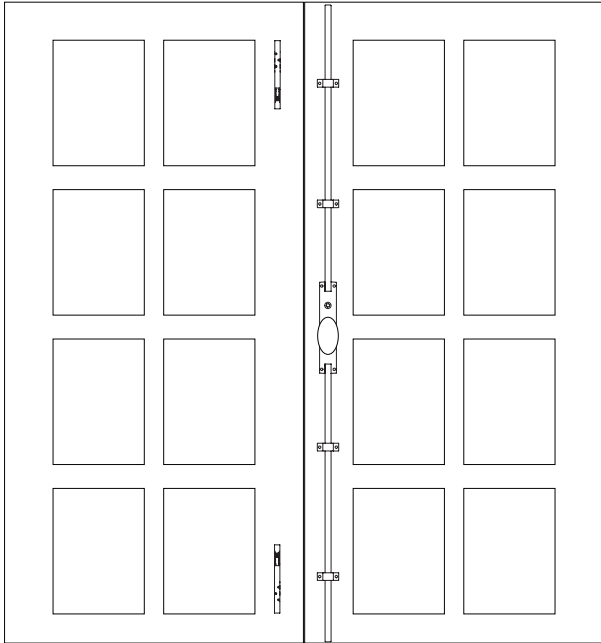

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

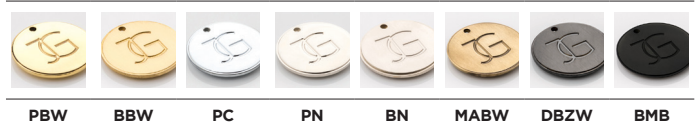


OPENING SIZE: _____ MM

HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

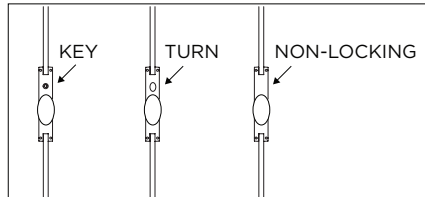

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the knob and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR KNOBS

Joseph Giles Cremone Bolts are available with a full selection of operating door knobs.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).


CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.

The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

ROD TYPE:
(please circle)

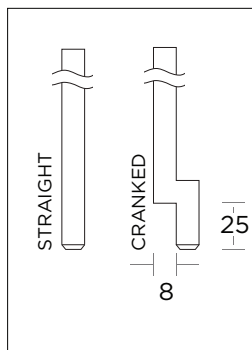


FLUSH BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm	<input type="checkbox"/>	<input type="checkbox"/>
203mm	<input type="checkbox"/>	<input type="checkbox"/>
305mm	<input type="checkbox"/>	<input type="checkbox"/>
457mm	<input type="checkbox"/>	<input type="checkbox"/>
609mm	<input type="checkbox"/>	<input type="checkbox"/>
762mm	<input type="checkbox"/>	<input type="checkbox"/>
914mm	<input type="checkbox"/>	<input type="checkbox"/>

LEVER TYPE: SPECIFY JOSEPH GILES KNOB CODE


DK _____

IS DOOR KNOB REQUIRED FOR OUTSIDE OF DOOR
YES / NO, IF YES PLEASE CIRCLE

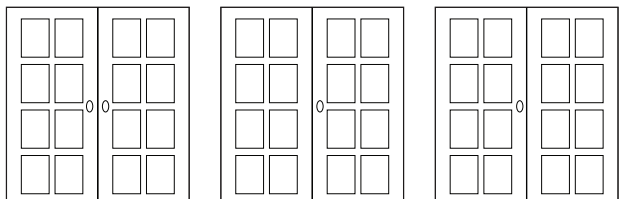

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left active, Inside Right Passive - Lever

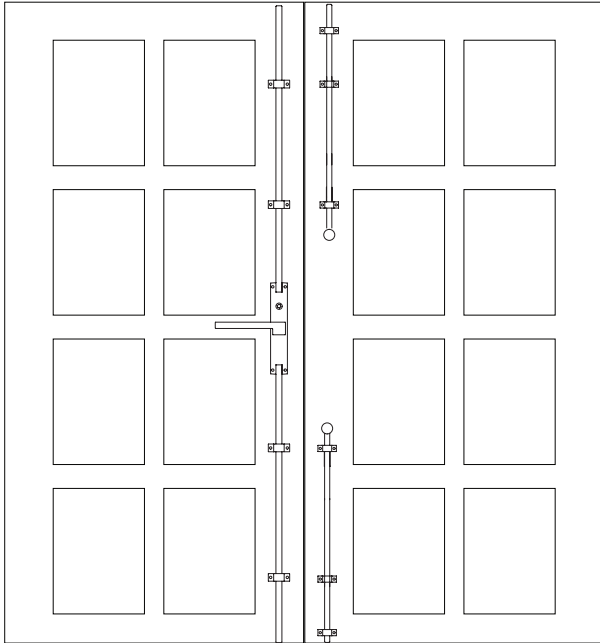

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

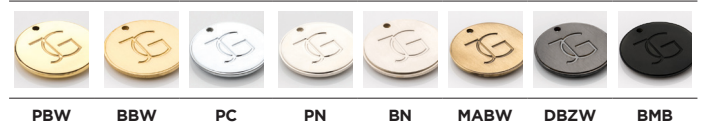


OPENING SIZE: _____ MM

HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

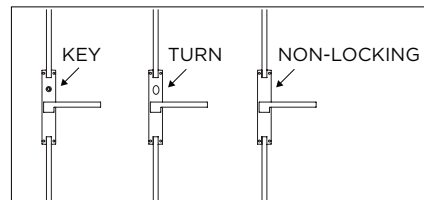

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the lever and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR LEVERS

Joseph Giles Cremone Bolts are available with a full selection of operating levers.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).


CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.

The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

ROD TYPE:
(please circle)




SKELETON BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm		
203mm		
305mm		
450mm		

LEVER TYPE: SPECIFY JOSEPH GILES LEVER CODE


LV _____

IS LEVER HANDLE REQUIRED FOR OUTSIDE OF DOOR YES / NO, IF YES PLEASE CIRCLE

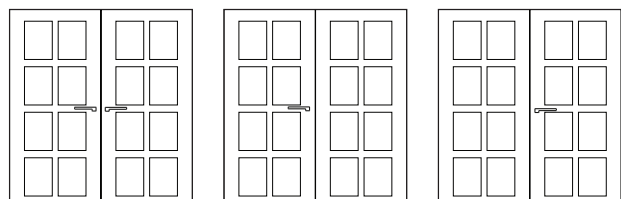

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left active, Inside Right Passive - Knob

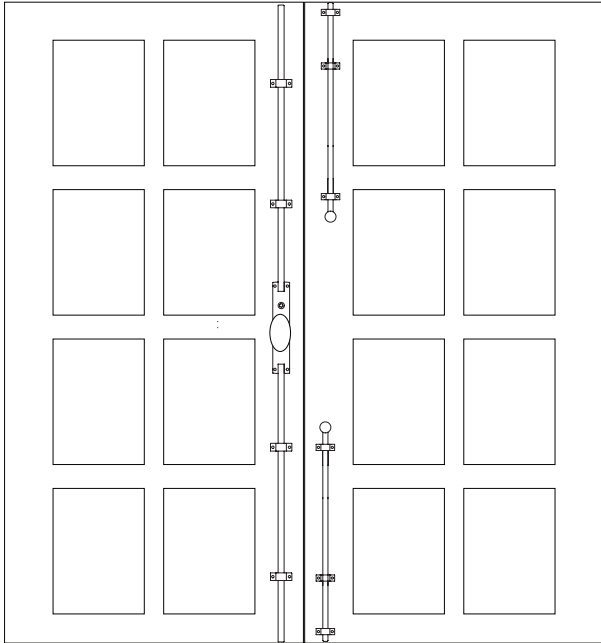

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

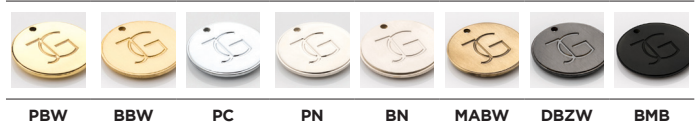


OPENING SIZE: _____ MM

HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

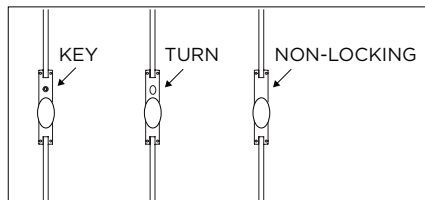

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the knob and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR KNOBS

Joseph Giles Cremone Bolts are available with a full selection of operating door knobs.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).


CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.

The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

ROD TYPE:
(please circle)

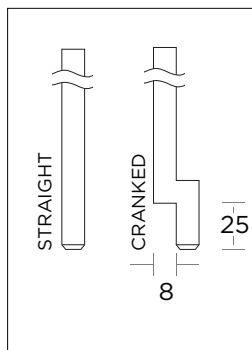


SKELETON BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm		
203mm		
305mm		
450mm		

LEVER TYPE: SPECIFY JOSEPH GILES KNOB CODE


DK _____

IS DOOR KNOB REQUIRED FOR OUTSIDE OF DOOR
YES / NO, IF YES PLEASE CIRCLE

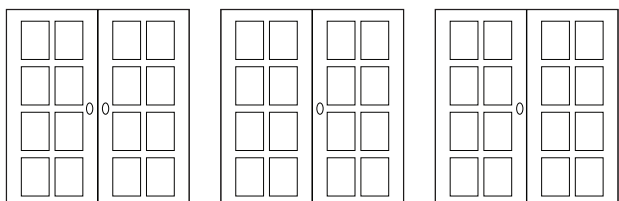

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left passive, Inside Right active - Lever

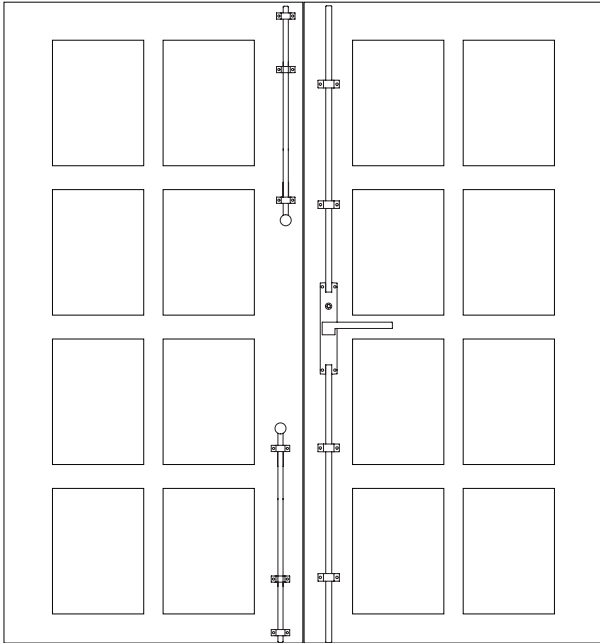

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

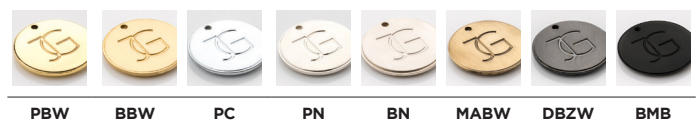


OPENING SIZE: _____ MM


HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

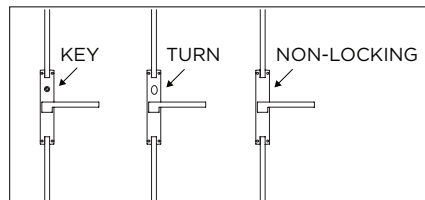

ROD TYPE:
(please circle)



SKELETON BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm		
203mm		
305mm		
450mm		

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the lever and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR LEVERS

Joseph Giles Cremone Bolts are available with a full selection of operating levers.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).

CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.


The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

LEVER TYPE: SPECIFY JOSEPH GILES LEVER CODE


LV _____

IS LEVER HANDLE REQUIRED FOR OUTSIDE OF DOOR YES / NO, IF YES PLEASE CIRCLE

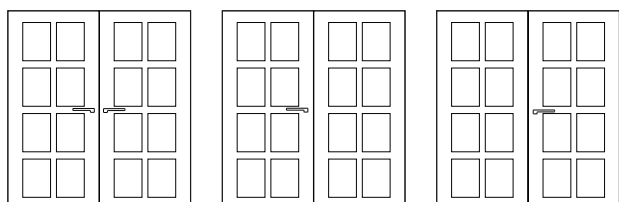

SPECIFY DOOR THICKNESS: _____ MM


Double Doors - Inside Left passive, Inside Right active - Knob

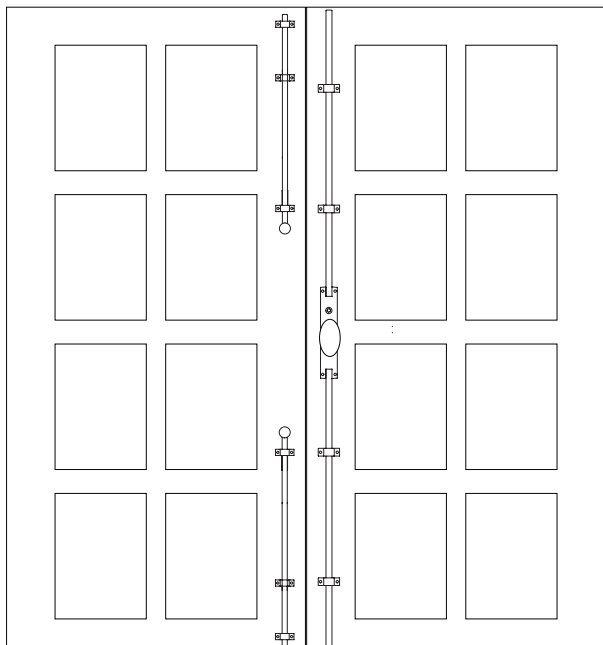

PLEASE COMPLETE ONE FORM PER DOUBLE DOOR

INSIDE OF DOOR SPECIFICATION:

FINISH: (please circle)

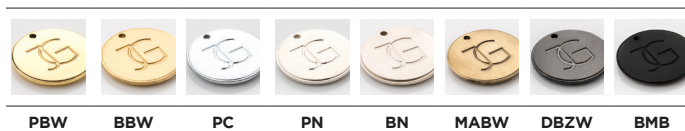


OPENING SIZE: _____ MM

HANDLE HEIGHT (centre): _____ MM

WIDTH OF DOOR STILE: _____ MM

LOCKING OPTION: (please circle)

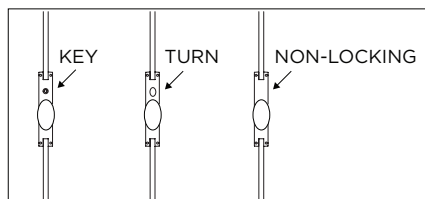

Joseph Giles Cremone Bolts are fitted with a unique non-handed rack & pinion gearbox mechanism which provides a 90 degree movement of the knob and a 13mm throw of the rods into the top and bottom of the door frame.

DOOR KNOBS

Joseph Giles Cremone Bolts are available with a full selection of operating door knobs.

LOCKING FUNCTION

Two lockable versions are available; one featuring a non-removable Locking Cap and separate key, and the other an Oval Turn version for emergency release (patio function).


CREMONE RODS

Cremone Rods are offered either straight or cranked design and made to length to suit the opening size and the desired position of the operating handle.

The Rods are supplied as standard with fully chamfered ends to aid engagement with strikes and staples.

NB. Due to length restrictions of certain finishes long Top Rods are occasionally supplied jointed - and supplied with an extra Guide to conceal the joint.

ROD TYPE:
(please circle)




SKELETON BOLT LENGTHS:
(please tick one of each column)

	TOP	BOTTOM
152mm		
203mm		
305mm		
450mm		

LEVER TYPE: SPECIFY JOSEPH GILES KNOB CODE

DK _____

IS DOOR KNOB REQUIRED FOR OUTSIDE OF DOOR
YES / NO, IF YES PLEASE CIRCLE

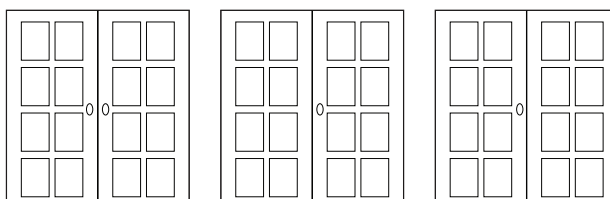

SPECIFY DOOR THICKNESS: _____ MM

THE ENGLISH TAPWARE COMPANY

751 HIGH ST, ARMADALE, VIC: 03 9818 1403 • 170 QUEEN ST, WOOLLAHRA, NSW: 02 9362 4736

www.englishtapware.com.au